


PROLAC

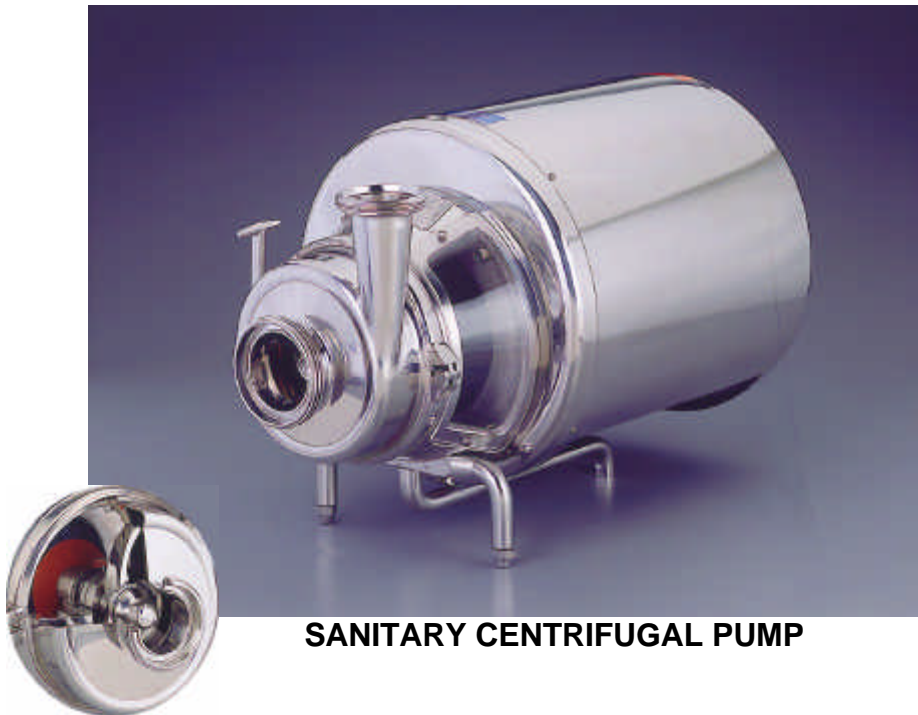

SANITARY CENTRIFUGAL PUMP

For Food, Dairy, Beverage, Pharmaceutical and related industries.

In stainless steel AISI 316L
IEC standard motors
Balanced mechanical seals
Double mechanical seals available

Flows up to 300 m³/h.
Maximum pressure 170 m.w.c.
Maximum temperature 140° C

| CAPACITY | HEAD | CODE | PUMP SIZE | POWER | SPEED | PRICE |
|-------------------|--------|------------|--------------|-------|-------|-------|
| m ³ /h | m.w.c. | | | KW | RPM | DEM |
| 10 | 12 | 8PR15A2005 | S-15A | 0,55 | 3000 | 2078 |
| 20 | 20 | 8PR20C2022 | S-20C | 2,2 | 3000 | 2804 |
| 30 | 30 | 8PR26E2040 | S-26E | 4 | 3000 | 3314 |
| 40 | 30 | 8PR26F2055 | S-26F | 5,5 | 3000 | 3479 |
| 5 | 35 | 8PR28C2022 | S-28C | 2,2 | 3000 | 3000 |
| 10 | 50 | 8PR28E2040 | S-28E | 4 | 3000 | 3484 |
| 30 | 35 | 8PR35F2055 | S-35F | 5,5 | 3000 | 4573 |
| 20 | 60 | 8PR35F2075 | S-35F | 7,5 | 3000 | 4788 |
| 50 | 40 | 8PR35F2090 | S-35F | 9 | 3000 | 4974 |
| 40 | 55 | 8PR35G2110 | S-35G | 11 | 3000 | 5282 |
| 60 | 10 | 8PR38E4040 | S-38E | 4 | 1500 | 4844 |
| 90 | 2 | 8PR38F4055 | S-38F | 5,5 | 1500 | 4903 |
| 60 | 40 | 8PR38G2110 | S-38G | 11 | 3000 | 6905 |
| 60 | 60 | 8PR38G2150 | S-38G | 15 | 3000 | 7328 |
| 80 | 50 | 8PR38G2185 | S-38G | 18,5 | 3000 | 7683 |
| 100 | 50 | 8PR38H2220 | S-38H | 22 | 3000 | 8316 |
| 130 | 40 | 8PR38J2300 | S-38J | 30 | 3000 | 9709 |
| 50 | 110 | 8PR70J2300 | S-70J | 30 | 3000 | 14062 |
| 200 | 30 | 8PR80J4300 | S-80J | 30 | 1500 | 16751 |

For specific applications, please, send your inquiries.
We will select for you the most suitable pump